




DVB 15N Pro

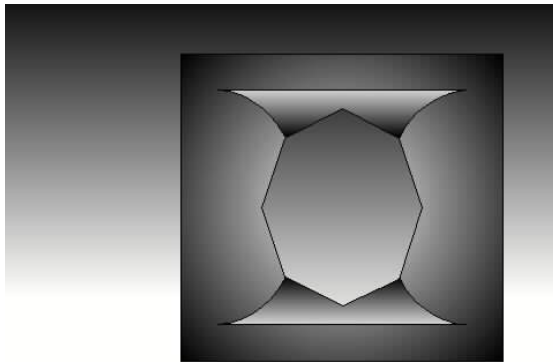

The DVB 15N Pro (shown as an illustration above) has an octagonal entry throat for a 15" cone type transducer for low and low-mid range reproduction. Its optimal range is 60Hz to 800Hz. At 15" deep this horn's nominal dispersion pattern is 70° x 70°. Designed to match the DMB 10N Pro or DMB 12N Pro in multi-way systems the DVB 15N is ideal for cluster configurations or to load the low end in medium to long throw club systems.

Sensitivity 103.1dB SPL
Nominal Gain +4.1dB
Frequency Range 30Hz - 1kHz
Frequency Response 60Hz - 800Hz
Dispersion 70°H x 70°V

Directivity Factor (Q) 12.3(+1.7 -3.3)
* * * * *
Dimensions 22"H x 22"W x 15"D
Weight 19.5 lbs.
Displacement 1.25 cu. ft.

Horizontal & Vertical Polar Response, 63Hz - 800Hz 1/3 octave center frequencies

