




CFD 1-60 Pro

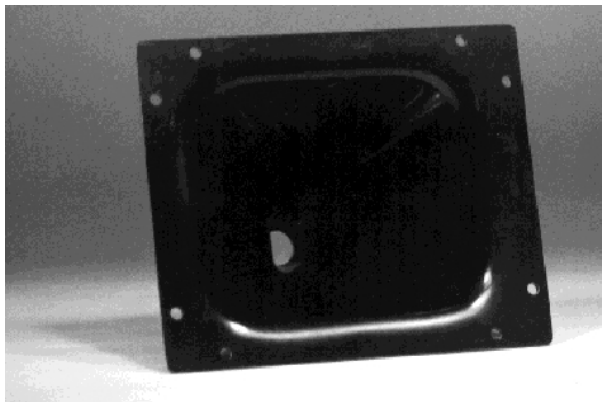

The CFD 1-60 Pro is a tight pattern 1" entry horn with 60° x 50° dispersion. The functional frequency response is 1kHz to 16kHz. This design couples in a precise pattern when splayed from 30° to 36° making it ideal for use in trapazoid boxes with 15° to 18° side angles. The CFD 1-60 Pro is also well suited for monitors and small venue enclosures where a 1" driver is required.

Sensitivity 107.3dB SPL
Nominal Gain +6.3dB
Frequency Range 800Hz - 18kHz
Frequency Response 1kHz - 16kHz
Dispersion 60°H x 50°V

Directivity Factor (Q) 18(+3.2-11.6)
* * * * *
Dimensions 8.5"Hx10"Wx7.625"D
Weight 6 lbs.
Displacement .4 cu. ft.

Horizontal & Vertical Polar Response, 630Hz - 16kHz 1/3 octave center frequencies

