




### CFD 1-70 Pro

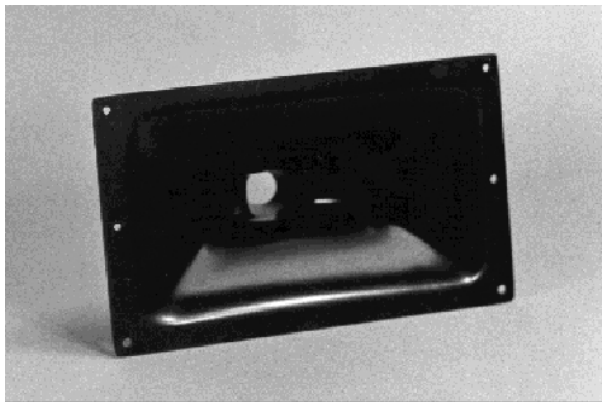

The CFD 1-70 Pro achieves convenient size and nearly perfect frequency response. This smaller 80° x 70° 1" entry horn matches well with a 12" low frequency driver for monitors, small club and foreground systems and church installations.

Sensitivity 110.1dB SPL  
Nominal Gain +5.1dB  
Frequency Range 800Hz - 18kHz  
Frequency Response 1kHz - 16kHz  
Dispersion 80°H x 70°V

Directivity Factor (Q) 9.1(+3.7-2.7)  
\* \* \* \* \*  
Dimensions 7"Hx11.5"Wx4.625"D  
Weight 2.5 lbs.  
Displacement .02 cu. ft.

Horizontal & Vertical Polar Response, 630Hz - 16kHz 1/3 octave center frequencies

