




**CFD 2-40X Pro / CFD 1.5-40X Pro**

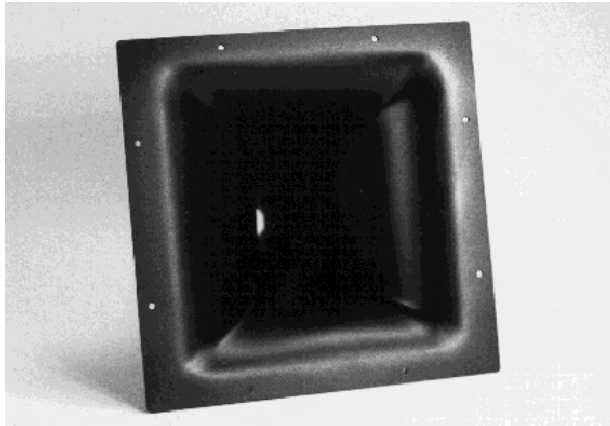

The CFD 2-40X Pro gives you superior control in the 800Hz to 16kHz range. Like all "X" series horns the CFD 2-40X is designed for large venues. The 2-40X Pro is designed to solve applications where 40° x 20° dispersion and high SPLs are required. Also available with a 1.5" entry throat.

Sensitivity 118.8dB SPL  
Nominal Gain +8.8dB  
Frequency Range 500Hz - 18kHz  
Frequency Response 800Hz - 16kHz  
Dispersion 40°H x 20°V

Directivity Factor (Q) 42(+6.9-13.2)  
\* \* \* \* \*  
Dimensions 18.375"Hx18.375"Wx18.75"D  
Weight 10 lbs  
Displacement .5 cu. ft.

Horizontal & Vertical Polar Response, 630Hz - 16kHz 1/3 octave center frequencies

