




## CFD 2-60X Pro / CFD 1.5-60X Pro

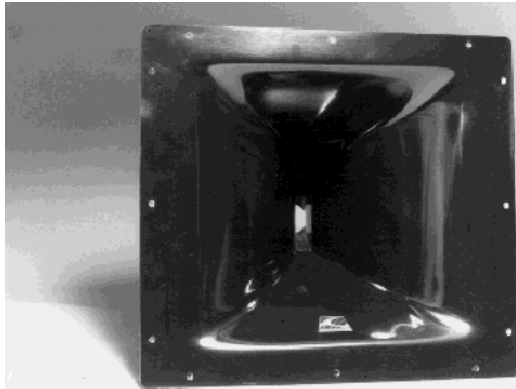

The CFD 2-60X Pro gives you superior control in the 800Hz to 16kHz range. Like all "X" series horns the CFD 2-60X is designed for large venues. The 2-60X Pro is designed to solve applications where 60° x 40° dispersion and high SPLs are required. Also available with a 1.5" entry throat.

Sensitivity 117.9dB SPL  
Nominal Gain +7.9dB  
Frequency Range 500Hz - 18kHz  
Frequency Response 800Hz - 16kHz  
Dispersion 60°H x 40°V

Directivity Factor (Q) 22(+3.2-11.6)  
\* \* \* \* \*  
Dimensions 18.5"Hx21"Wx14"D  
Weight 6 lbs.  
Displacement .4 cu. ft.

Horizontal & Vertical Polar Response, 630Hz - 16kHz 1/3 octave center frequencies

