




### CFD 2-61 Pro / CFD 1.5-61 Pro

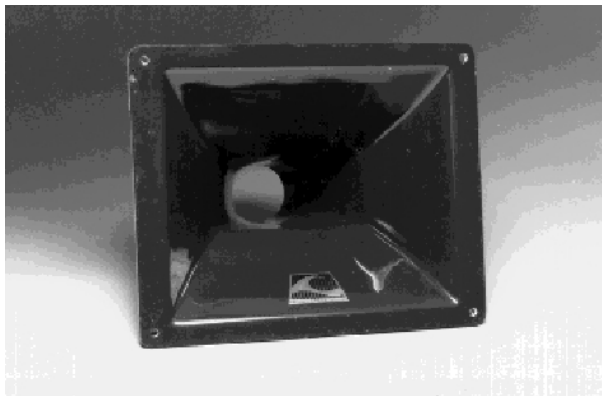

The CFD 2-61 Pro is a 2" entry throat, consistent "Q" horn with an optimum frequency range of 1kHz to 16kHz. It has been designed for excellent pattern control in tight mounting situations. This horn is ideal for applications including spot monitoring and moderate field mains. Also available with a 1.5" entry throat.

Sensitivity 112.1dB SPL  
Nominal Gain +5.2dB  
Frequency Range 800Hz - 18kHz  
Frequency Response 1kHz - 16kHz  
Dispersion 63°H(+1.1-3.1) x 52°V(+2.1-2.5)

Directivity Factor (Q) 15.7(+4.6-3.6)  
\* \* \* \* \*  
Dimensions 9"Hx11"Wx7.5"D  
Weight 3.5 lbs.  
Displacement .14 cu. ft.

Horizontal & Vertical Polar Response, 630Hz - 16kHz 1/3 octave center frequencies

