




CFD 2-63 Pro / CFD 1.5-63 Pro / CFD 1.4-63 Pro

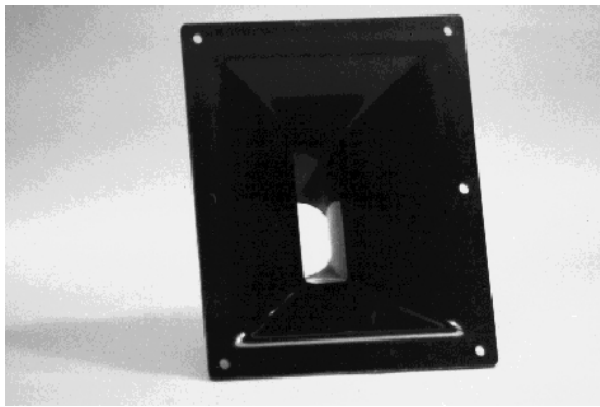

The CFD 2-63 Pro is an upgrade of the CFD 2-61 Pro. This design includes the DDS Dynamic Throat Section (DTS™) for higher SPL with a smoother response. Well suited for large side-fill monitors Medium and small venue mains and high SPL wedge monitors. This design can easily be mounted between or beside 12" and 15" drivers. Also available with a 1.5" and 1.4" entry throat.

Sensitivity 113.1dB SPL
Nominal Gain +6.2dB
Frequency Range 1kHz - 18kHz
Frequency Response 1.2kHz - 16kHz
Dispersion 63°H(+0-2.1) x 50°V(+1.1-.5)

Directivity Factor (Q) 16.2(+3.2-7.8)
* * * * *
Dimensions 11"Hx9"Wx7.5"D
Weight 4 lbs.
Displacement .14 cu. ft.

Horizontal & Vertical Polar Response, 630Hz - 16kHz 1/3 octave center frequencies

