




CFD 2-70 Pro / CFD 1.5-70 Pro / CFD 1.4-70 Pro

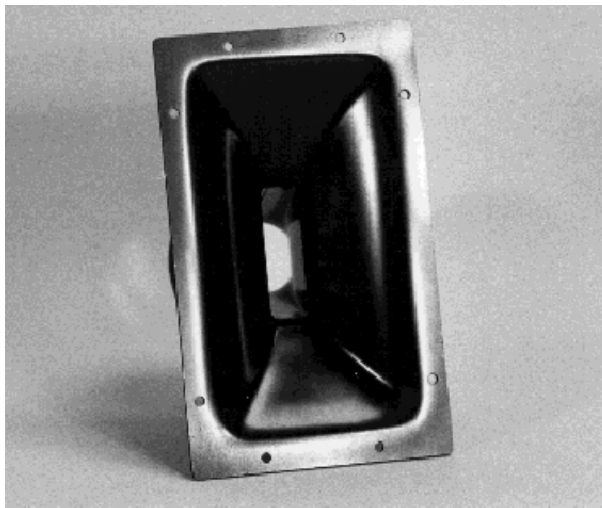

The CFD 2-70 Pro is a nominal 70° x 45° horn with a 2" entry throat designed for low profile monitors. The CFD 2-70 Pro easily mounts beside or between 12" and 15" drivers. This horn can also be vertically paired with a 90° rotation for a nominal 70° x 70° pattern ideal for high SPL applications. Also available with a 1.5" and 1.4" entry throat.

Sensitivity 115.8dB SPL
Nominal Gain +5.8dB
Frequency Range 800Hz - 18kHz
Frequency Response 1kHz - 16kHz
Dispersion 73°H(+1.0-4.2) x 47°V(+.8-2.2)

Directivity Factor (Q) 12.3(+4.1-6.5)
* * * * *
Dimensions 11.5"Hx7"Wx5.125"D
Weight 3.2 lbs.
Displacement .1 cu. ft.

Horizontal & Vertical Polar Response, 630Hz - 16kHz 1/3 octave center frequencies

