




CFD 2-90X Pro / CFD 1.5-90X Pro / CFD 1.4-90X Pro

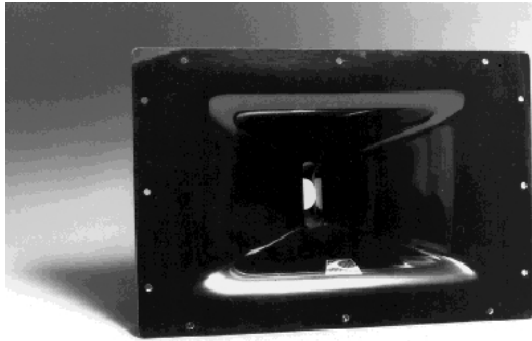

The CFD 2-90X Pro gives you superior control in the 800Hz to 16kHz range. Like all "X" series horns the CFD 2-90X is designed for large venues. The 2-90X Pro is designed to solve applications where 90° x 40° dispersion and high SPLs are required. Also available with a 1.5" and 1.4" entry throat.

Sensitivity 116.6dB SPL
Nominal Gain +6.6dB
Frequency Range 500Hz - 18kHz
Frequency Response 800Hz - 16kHz
Dispersion 90°H x 40°V

Directivity Factor (Q) 12.4(+2-8.6)
* * * * *
Dimensions 14.5"Hx21"Wx9.5"D
Weight 4 lbs.
Displacement .22 cu. ft.

Horizontal & Vertical Polar Response, 630Hz - 16kHz 1/3 octave center frequencies

